


SOLAR ELECTRONICS CO.

LINE IMPEDANCE STABILIZATION NETWORK

TYPE 8028-50-BP-24-BNC
(formerly Type 8028-50-TS-24-BNC)

CURRENT RATING 24 Amperes
IMPEDANCE 50 uH
RECOMMENDED FREQUENCY RANGE 10 kHz - 100 MHz
VOLTAGE (line to ground) 270 V., 50 - 60 Hz, 135 V., 400 Hz
POWER CONNECTIONS 3/4" Binding posts
RF CONNECTOR Type "BNC"
COUPLING CAPACITOR 0.25 uF
CIRCUIT Single
CASE SIZE 4.5" (11.43cm) X 4.5" (11.43cm) X 9.25" (23.5cm)

REMARKS: Designed for **FCC part 15., ANSI C63.4-1992, CISPR PUB 16-1987** (150 kHz - 30 MHz) **VDE 0876, MIL-STD-461D, MIL-STD-461E**

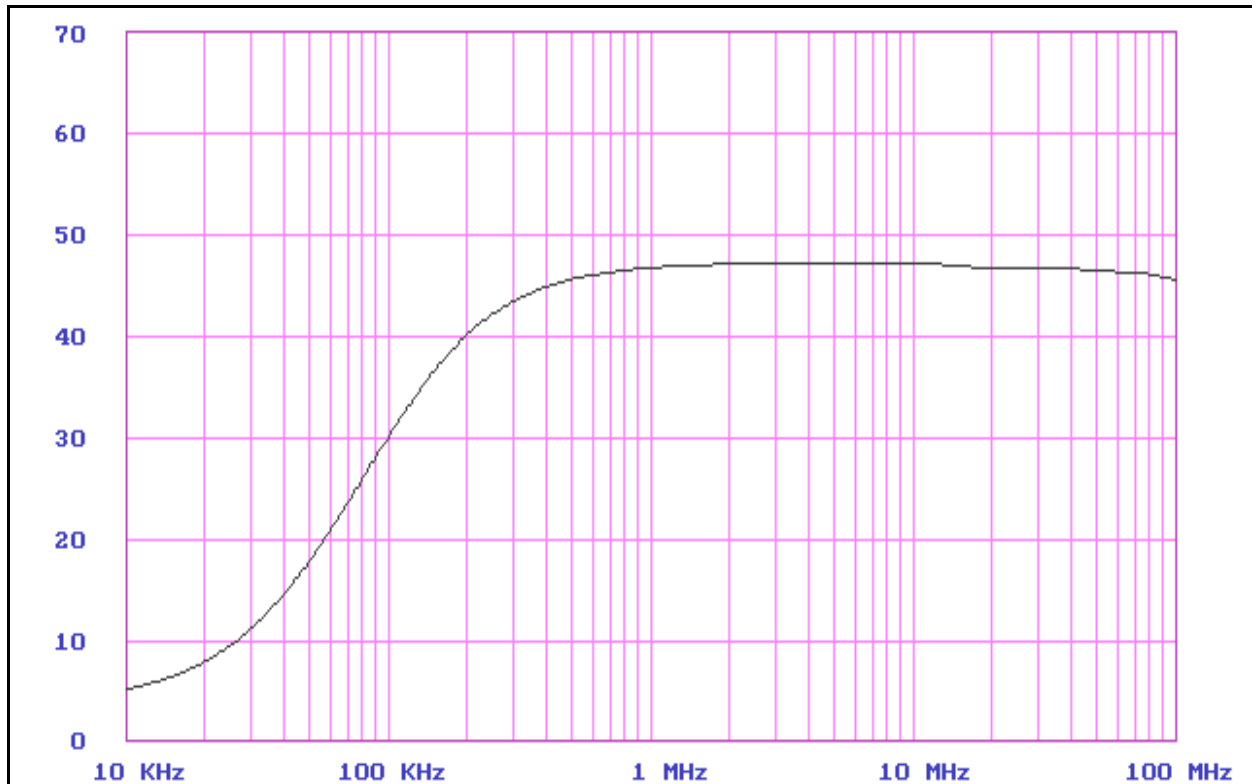

Typical Impedance in a 50 ohm circuit